

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 600 004 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
02.12.1998 Bulletin 1998/49

(21) Application number: 92918727.6

(22) Date of filing: 13.08.1992

(51) Int. Cl.<sup>6</sup>: **A46B 11/00**

(86) International application number:  
PCT/US92/06770

(87) International publication number:  
WO 93/03649 (04.03.1993 Gazette 1993/06)

**(54) SUSTAINED-RELEASE MATRICES FOR DENTAL APPLICATION**

**MATRIZEN MIT VERZÖGERTER FREISETZUNG FÜR DENTALZWECKE**

**MATRICES A LIBERATION PROLONGÉE POUR APPLICATION DENTAIRE**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IE IT LI LU NL SE**

(30) Priority: 23.08.1991 US 749137  
15.06.1992 US 898471

(43) Date of publication of application:  
08.06.1994 Bulletin 1994/23

(73) Proprietor: **THE GILLETTE COMPANY**  
Boston, Massachusetts 02199 (US)

(72) Inventors:  
• **TSENG, Mingchih, M.**  
Hingham, MA 02043 (US)  
• **PHILBROOK, Carl, M.**  
Jamaica Plain, MA 02130 (US)

(74) Representative:  
**Nette, Alexander et al**  
**Hoffmann Eitle,**  
Patent- und Rechtsanwälte,  
Postfach 81 04 20  
81904 München (DE)

(56) References cited:

GB-A- 259 268	US-A- 846 900
US-A- 1 673 638	US-A- 2 216 333
US-A- 3 810 479	US-A- 3 934 001
US-A- 3 992 336	US-A- 4 018 729
US-A- 4 411 041	US-A- 4 780 320
US-A- 4 980 150	US-A- 5 061 106
US-E- R E21 197	

• **PATENT ABSTRACTS OF JAPAN** vol. 16, no. 512  
(C-0998) 22 October 1992 & JP-A-04 193 103  
(TAISHO PHARMACEUT) 13 July 1992

**EP 0 600 004 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

The invention relates to sustained-release matrices for dental application. It also relates to a brush comprising such matrices and a method of releasing an antimicrobial agent from an oral brush.

5 Most humans suffer from tooth decay and/or periodontal disease caused by bacteria in the mouth. As a result, decreasing the number of bacteria in the mouth has long been the target of persons working in the health care field. The most common way of minimizing the number of bacteria is to brush and floss the teeth regularly, and to visit a dental hygienist to have the teeth and gums cleaned thoroughly. Another prior approach is oral rinsing, including with a solution containing a known anti-microbial agent like chlorhexidine digluconate.

10 After a toothbrush has been used, there are a large number of bacteria clinging to the bristles, even after the brush has been rinsed. This, of course, is undesirable, and these bacteria typically will multiply on the bristles between uses. To counter this problem, self-sterilizing toothbrushes have been described in the prior art. One such self-sterilizing toothbrush is described by White et al., U.S. Patent No. 2,216,333, and includes a combination of a water soluble salt (e.g., sodium carbonate) with an anti-microbial agent (e.g., sulfur). The two are fused to a solid hard body and attached to the head of the toothbrush at the base of the bristles. When exposed to water the sodium carbonate dissolves, forming an alkaline solution that in turn dissolves some sulfur, which kills bacteria.

Toothbrushes wear out with extended use. Breuer et al., U.S. Pat. No. 4,802,255, describe a toothbrush that includes filaments that release a dye, and thus change color, in response to increased use of the filament. The change in color provides a means for monitoring the degree of wear of the toothbrush.

20 Kent, U.S. Pat. No. 5,061,106, describes including capsules or microspheres in the tuft holes in which the bristles of a toothbrush are mounted. The capsules or microspheres include a disinfectant or medicant that is released during use. A dye may also be included in the structures. The dye also is released over time to enable the user to become aware of when the contents of the capsules are depleted.

In accordance with the present invention there is provided an oral brush (10) comprising a body comprising a handle (12) and head (14); a brush portion connected to the head of said body and an attached layer comprising an anti-microbial agent characterized by said layer being a sustained-release matrix (20) attached to said body at or near said head (14), said matrix (20) comprising a water-insoluble support resin, a water-soluble polymer, and said anti-microbial agent.

30 Further provided in accordance with the present invention is a method of releasing an anti-microbial agent from an oral brush, comprising providing an oral brush including a body (10) with a handle (12) and a head (14), a brush portion attached to said head (14), and an attached layer comprising an anti-microbial agent, characterized by said layer being a sustained-release matrix (20) attached to said body at or near said head, said matrix (20) comprising a water-insoluble support resin, a water-soluble polymer, and said anti-microbial agent; and contacting the portion of said brush (10) to which said matrix (20) is attached with water, causing said water-soluble polymer in said matrix (20) to dissolve thereby releasing said anti-microbial agent into said water.

35 Also provided in accordance with the present invention is a wear-indicating matrix (20) characterized by comprising a water-insoluble support resin, a colorant and a water-leachable substance that leaches into water during use to cause said matrix (20) to change color after repeated uses.

40 The invention features sustained-release matrices that are particularly suited for use with toothbrushes. The matrices can include an anti-microbial agent that is released over time when the matrices are exposed to water. The matrices may also include a colorant and a water-leachable substance that is released over time when the matrices are exposed to water to cause the matrix to change color.

In one aspect the invention features an oral brush that includes a sustained-release matrix made from a support resin, a water-soluble substance (preferably a water-soluble polymer), and an anti-microbial agent. When the matrix contacts water, the water-soluble substance dissolves, causing the release of the anti-microbial agent.

45 An oral brush, as used herein, is any brush that includes a handle and a head attached to a brush designed for insertion into the mouth. The brush portion preferably is made from the common bristles found in toothbrushes, but can also be designed for massaging the gums rather than the teeth. For example, Kaminski et al., USSN 07/724,129, which was filed on July 1, 1991, is assigned to the same assignee as the present application, describes an interdental foam brush in which the brush portion is made of a soft polyurethane foam.

50 A support resin, as used herein, is an essentially water-insoluble polymer that provides structural integrity to the matrix as the other components of the matrix -- the water-soluble polymer and anti-microbial agent -- dissolve or leach out. A further description of what constitutes a support resin is included in the Other Embodiments section. Preferably, the polymer used as the support resin should have a low processing temperature (less than 130°C.) so that it can be readily combined with anti-microbial agents that are unstable at high temperature. Also, the polymer should not become brittle as the other components dissolve or leach out, so that the matrix does not break apart readily when handled.

55 Preferred polymers for the support resin include polystyrene, polyurethane ethylene vinyl acetate, polyethylene, styrene/rubber, and ethylene/propylene. The more preferred support resin is an ethylene vinyl acetate polymer. Most

preferably the ethylene vinyl acetate polymer includes between 5% and 50% vinyl acetate, and has a softening point of between 100°C. and 35°C., respectively.

A water-soluble substance, as used herein, is a substance that is sufficiently soluble in water that it will dissolve out of the matrix during contact with water to form channels in the matrix through which the anti-microbial agent will leach into the water. A further description of what constitutes a water-soluble substance is provided in the Other Embodiments section.

The preferred water-soluble substances are polymers. The preferred polymers are starches, polyvinyl alcohols, polyethylene oxides, hydroxyalkyl starches, hydroxyethyl and hydroxypropyl celluloses, and gelatins. The most preferred are polyethylene oxides, most preferably a Polyox having a molecular weight of between 100,000 and 5,000,000.

An anti-microbial agent is a substance that kills bacteria. The preferred anti-microbial agent for use in the matrix is chlorhexidine, most preferably the digluconate salt thereof; the hydrochloride and diacetate salts of chlorhexidine can also be used. Other anti-microbial agents that can be included in the matrix include tetracycline (and other antibiotics), and domiphen bromide.

Preferably, the matrix is a flat template having a thickness of up to 4 mm and is attached to the head of the body at the base of the bristles. The preferred templates have a surface area of at least 0.0645 cm<sup>2</sup> (0.01 in<sup>2</sup>), more preferably at least about 0.645 cm<sup>2</sup> (0.1 in<sup>2</sup>). Most preferably, the template has the same surface area as the toothbrush head (minus the bristles). In this position the template is exposed to water when the brush is rinsed and to saliva when it is inserted into the mouth, and can supply the anti-microbial agent to the bristles for self-sterilization and to the mouth to kill bacteria. The matrix can also be attached to any other part of the brush (e.g., the back of the brush head or at the junction of the brush head and handle), provided that the part of the brush it is attached to is sufficiently close to the head end that it typically is inserted into the mouth during use.

In other preferred embodiments, the matrix includes two layers, joined together. By "two layers", it is meant that one section of the template has a different composition than a second section. The first outer layer includes a support resin or a water-soluble polymer, and an anti-microbial agent; the second inner layer includes the support resin. Significantly, the first layer can include a large quantity of antimicrobial agent because the layer includes less (or none) of the support resin, yet the layer is stable because the co-extruded second layer provides the necessary support. The second layer may also include, optionally, some water-soluble polymer and/or anti-microbial agent.

The invention features, in another aspect, an oral brush that includes a template including a water-soluble polymer and an anti-microbial agent.

The invention features, in another aspect, a matrix including ethylene vinyl acetate, polyethylene oxide, and an anti-microbial agent such as chlorhexidine. The matrix can be sized, shaped, and otherwise designed for short or long term placement at some point in the mouth. The matrix can also be designed as a template for inclusion on a toothbrush, or can be used to coat dental floss, or other dental instrument(s).

The matrices of the invention provide a controlled release of an anti-microbial agent into the mouth. When included on a toothbrush, the matrix repeatedly supplies controlled dosages of the agent to kill bacteria in the mouth and on the bristles of the brush. The matrices are easy to manufacture, and their composition, shape and thickness can be adjusted to provide the best properties for the intended use. For example, the amount and type of polyethylene oxide in the preferred embodiment can be modified so that the viscosity of the released polymer in solution is less than the viscosity of the saliva in the mouth.

Another aspect of the invention features a wear-indicator oral brush that includes a matrix containing a colorant (e.g., a dye) and a water-leachable substance that is released from the matrix when the oral brush is used to cause the matrix to change color after repeated (at least 5) typical uses. The preferred matrix is a template that includes two co-extruded or co-molded layers. The outer layer, which contacts water and saliva during brushing, preferably includes the water-leachable substance, which can be, for example, a water-soluble polymer like polyethylene oxide, or the colorant itself, or a combination of the two. The second, inner, layer preferably includes a support resin, and can also include a colorant (e.g., TiO<sub>2</sub>) that provides the template with a different color, or shade of color, than the colorant included in the outer layer. The first layer preferably also includes a support resin, although less than the amount included in the second layer, and also can include an anti-microbial agent.

The oral brushes having a matrix including a colorant, i.e., pigment or dye, provide a means to monitor the degree of wear of the brush. Where the water-leachable substance includes the colorant, over time as the brush is used the colorant is released, causing the matrix to change color. In those embodiments in which the colorant is not water-leachable and thus is not released from the matrix, typically the portion of the template including a water-leachable substance dissolves away through repeated use of the brush to expose the section of the matrix that includes the colorant, providing an indication of wear. The amounts and types of colorant in the matrix can be adjusted so that the color of the matrix changes after the number of uses through which a typical brush should be used. When the colored matrix also includes an antimicrobial agent, the change of colorant can be designed to correspond with the depletion of the agent in the matrix.

Other features and advantages of the invention will be apparent from the description of the preferred embodiment

thereof, and from the claims.

Figure 1 is a perspective view of the preferred toothbrush.

Figures 2a-2e provide perspective views of some alternative two-layer templates. Figure 2f is a cross-sectional view of the template of Figure 2e, taken along line A-A. In these figures the holes through which the bristles would be inserted are not shown.

Referring to Fig. 1 a toothbrush 10 includes a plastic body having a handle 12 and a head 14 attached to a bristle portion 16. Also attached to the head at the base of the bristles is template 20, a sustained-release matrix.

The body of the toothbrush is formed by conventional methods well-known in the art. The handle is shaped to be grasped by a hand, but alternatively can be shaped to fit into an electric toothbrush. The configuration of the head can vary and may be oval, convex curved, flat trim, or serrated V, or any other desired configuration. The shape and size of handle 12 and head 14 can vary and the axes of the handle and head may be on the same or a different plane. The bristle portion is formed of tufts of individual filaments attached to the head in manners known to the art. Preferred filaments are those formed of polyamide and polyester. The filaments preferably have substantially uniform longitudinal lengths of between 0.3 and 6 cm, and substantially uniform cross-sectional dimensions between about 110 to about 350 microns.

There are three types of preferred templates.

#### 1. Single-layer template including chlorhexidine

The single-layer template consists of a resin, ethylene vinyl acetate; a water-soluble polymer, Polyox; and an anti-microbial agent, chlorhexidine digluconate.

Ethylene vinyl acetate is the backbone of the matrix and has negligible solubility in water. It provides the matrix with its structural integrity when the other components of the matrix leach out during use. Ethylene vinyl acetate has low toxicity and grades are available that have low processing temperatures. Importantly, ethylene vinyl acetate maintains the integrity of the matrix without becoming stiff and brittle.

A sufficient amount, preferably greater than 50 percent by weight, of ethylene vinyl acetate should be included in the matrix so that when the other components leach out there is still enough resin present to maintain the structure of the matrix. Of course, not so much should be included that the matrix cannot be loaded with a sufficient amount of the water-soluble polymer and anti-microbial agent; preferably, the matrix should include less than 90 percent of the ethylene vinyl acetate by weight.

The ethylene vinyl acetate polymer used in the matrix preferably should contain between 5 percent and 50 percent by weight vinyl acetate. If the polymer includes too little vinyl acetate, the matrix may be too stiff and require higher processing temperatures. If the polymer includes too much vinyl acetate, the matrix may be rubber-like and too soft to process.

Polyox water-soluble resins are non-ionic ethylene oxide homopolymers that range in molecular weight from about 100,000 and 5,000,000. Polyox has a very low degree of toxicity, and grades are available that have a low processing temperature, and are completely water soluble in cold and warm water.

The preferred Polyox, available from DuPont, is WSR N-750® which has a molecular weight of 300,000. WSR N-750 has a water solubility that is sufficient to provide a controlled-release of the anti-microbial agent from the matrix at bactericidal levels, but the solubility in the matrix is low enough that it dissolves out slowly, over a period of many uses.

The matrix preferably contains between 5 percent and 40 percent Polyox WSR N-750 by weight. If too much Polyox is included, the antimicrobial agent may leach out too quickly, and the structural integrity of the matrix once most of the Polyox has leached out may be adversely affected. If too little Polyox is included, too low a quantity of the anti-microbial agent may be released from the matrix during use.

The preferred anti-microbial agent is chlorhexidine digluconate, which is well-known for its gingivitis-prevention properties. The amount of chlorhexidine included in the matrix depends on the level of the desired dosage and amount of Polyox; preferably, the matrix includes between 1 percent and 30 percent of chlorhexidine digluconate by weight. If too high a level of chlorhexidine is included, the matrix may become brittle. Of course, a sufficient amount of the agent should be included so that enough is released during use to be effective.

The template should be formed to fit to the shape of the head at the base of the bristles, and should be as thick as possible to allow for many uses before all of the anti-microbial agent is leached out. Preferably, the template is at least 0.5 mm thick to ensure adequate mechanical strength, and can be up to at least 4 mm thick.

In use, the toothbrush is rinsed with water, toothpaste applied, and then the head of the brush is inserted into the mouth to brush the teeth with the bristles. Upon contact with water some of the anti-microbial agent diffuses out of the matrix, onto and down the bristles, and eventually into the saliva of the mouth, killing bacteria on contact. As the Polyox slowly dissolves with repeated uses of the brush, water is allowed to penetrate into the matrix, making more of the anti-microbial agent accessible by diffusion from the matrix core. Eventually, all of the Polyox and agent have left the matrix, and the toothbrush is discarded.

The matrix is designed to incorporate the desired criteria of release rate, dosage, and effective template lifetime by adjusting the thickness of the template included on the brush, the quantity of anti-microbial agent contained in the matrix, and the quantity of Polyox, or other water-soluble polymer, included in the matrix. The higher the desired dosage, the greater the quantity of water-soluble polymer and agent included in the matrix. Also, to increase the released dosage, a more water-soluble form of Polyox can be employed. The lifetime of a given matrix can be increased by increasing the thickness of the template.

Examples of preferred matrices were made by the following procedure.

#### Materials

##### a. Chlorhexidine digluconate

A 20 percent solution of chlorhexidine digluconate, available from Pliva Pharmaceutical, Chemical, Food, and Cosmetic Industry of Zagreb, Yugoslavia, or ICI, was freeze-dried as follows:

1. Measure 500 ml of chlorhexidine digluconate in a graduated cylinder and transfer it to a 1 liter flask.
2. Adjust volume to 1 liter with double distilled filtered water and mix together.
3. Transfer 300 ml. portions of mixture to glass evaporating dishes 20.32 cm (8 inch diameter).
4. Place all evaporating dishes in the freeze-drying apparatus until all water is removed.
5. Transfer the chlorhexidine freeze-dried powder to a 1 liter glass bottle and cap.
6. Store the bottle in a refrigerator or a dark room at approximately 4°C.

##### b. Ethylene Vinyl Acetate

The most preferred ethylene vinyl acetate is sold by DuPont under the tradename ELVAX 360, and has a vinyl acetate content of 25 percent by weight; a tensile strength of 18.0 Mpa at 23°C. (ASTM D638); an elongation of 800 percent at 23°C. (ASTM D638); a softening temperature of 53°C. (ASTM D1525); and a flexural modulus of 26 Mpa at 23°C. (ASTM D790). ELVAX 360® contains 500 ppm BHT as an anti-oxidant.

In order to mix with chlorhexidine and Polyox powders, ELVAX 360 pellets are ground into powders with particle sizes of less than 250 microns with a Glen Mill Granulator (Model #CS 150/100-2) installed with a screen plate having 1 mm screen holes. A suction system is added to the grinding chamber to facilitate the removal of powders from the chamber to a container. During grinding, the material is recycled through the grinder as many times as necessary (usually two or three passes) to meet the size requirement. A sieve shaker manufactured by the W.S. Tyler Co. is used to control the sizes as needed.

##### c. Polyox

Polyox WSR N-750 is available from Union Carbide, and has a melting point of 62-67°C. and a molecular weight of 300,000. The Polyox is used as received and mixed with other components to form the template.

##### d. Blending of Materials

The ELVAX 360, Polyox, and chlorhexidine digluconate are mixed in a blender. Each component is first weighed and then poured into a glass jar with a capacity of 0.5 kilograms. The jar is then placed on a ball-mill rotator and mixed for approximately 1/2 hour. For a quantity greater than 0.5 kilograms, a V-blender manufactured by Patterson-Kelly Co. Inc. is used. The blended material should be stored in a dry, cool room.

##### e. Processing

The conventional equipment used to produce the matrix includes an extruder, a cooling plate, and a puller. An extrusion die with an opening of 5.08 cm (2") wide is used. To control the thickness of the template, the die utilizes a flexible lip design which enables the die lip to be adjusted anywhere from 0.38 cm to 1.14 cm (0.15" to 0.45"). Each die is supplied with a sensor for the recording of melt pressure and temperature. Pulling speed are adjusted to produce a 2.54 cm (1") wide strip with a thickness of 0.051 cm (0.020") or 0.102 cm (0.040"). The strip can then be fabricated into templates.

Samples were made with both a twin-screw and single-screw extruder. The Werner & Pfleiderer 30mm twin-screw extruder is based on a corotating and intermeshing twin-screw system. To minimize Polyox and chlorhexidine degradation during processing, the twin screws consists of only two high-shear kneading elements and the rest being low-shear

## EP 0 600 004 B1

conveying screw elements; the screw speed and processing temperatures are reduced to a minimum. The mixture is fed using a K-Tron twin-screw feeder (Model T20).

Alternatively, a Haake 1.90 cm (3/4 inches) single-screw extruder equipped with a 5HP drive motor is employed. When making the most preferred matrix, the extruder was operated with a screw speed of 35 rpm, a barrel pressure of 4.92 Kg/cm<sup>2</sup> (70 psi), a die pressure of 5.62 Kg/cm<sup>2</sup> (80 psi), barrel temperature of 113°C., and a die temperature of 113°C.

The blend of materials is fed to either extruder and the strip produced is pulled onto a plate by a Farris puller at a speed of between three or four feet per minute with minimum tension on the strip. The strip is cooled on a plate placed inside a PVC tube by blowing dry compressed air into the tube at approximately 283.2 l/m (10 CFM). The finished product should be kept in a cool, dry room.

The matrices can also be made by other conventional processes, such as by injection molding, casting foam dispensing machines, and reaction injection molding. In addition, two color injection molding can be used to make the toothbrush/matrix combination.

### Toothbrush Preparation

Toothbrushes including the sustained-release matrix were prepared according to the following procedure:

1. Toothbrush handles with undercuts on the toothbrush head for placing templates were molded.
2. The strips prepared above were cut into two strips having maximum width of 1.55 cm (39/64"). Tape was used to hold the material to prevent stretching.
3. Sets of holes corresponding to the desired bristle pattern to be used with the brush were punched with a Dake arbor press.
4. Templates of the desired size were cut from the strips, and glued to the head of the toothbrush body.
5. The bristles were attached to the head by standard procedures.

### Testing for Sustained-Release Properties

The sustained-release matrices of the invention can be tested for their long-term release profiles according to the following procedure.

First, a calibration plot of chlorhexidine digluconate in distilled water was prepared over concentration range of 2 to 40 mcg/ml. Release studies were performed in triplicate; the procedure is summarized below:

1. Samples 1.27 cm x 2.54 cm (1/2" x 1") were cut from the strip by random sampling.
2. The samples were placed in 250 ml beakers, which were then set into a shaking water bath (37°C., 80 rpm).
3. 5 ml of distilled water were pipetted to each beaker.
4. After 5 minutes, the samples were removed from beakers and assayed for chlorhexidine content in release solution by uv-spectrophotometric analysis.
5. This procedure was repeated for 100 release periods.

The preferred strips showed excellent chlorhexidine release characteristics over extended periods of use. The composition of the preferred strips, and their release properties after 100 uses, are summarized in the Table below. In the Table, EVA is the preferred ethylene vinyl acetate discussed above; the Polyox is either the more preferred WSR N-750, or a 60:40 blend (60% Polyox coagulant grade, 40% WSR N-750 from Union Carbide); CHG is chlorhexidine digluconate; "S" means the template was prepared by single-screw extrusion, "T" by twin-screw extrusion; [CHG] (ppm) is the concentration of CHG in ppm in the release solution at 100 releases and 60m (60 mesh) or 18m (18 mesh) is the particle size of chlorhexidine digluconate employed (no particle size listing indicates that the chlorhexidine was not sieved following freeze-drying). All of the templates were still releasing over 1 ppm chlorhexidine after 100 uses. The most preferred matrix is 2mm thick and includes 60% EVA, 15% Polyox WSR N-750, and 25% chlorhexidine digluconate.

Thickness (mm)	Composition(%)				[CHG] (ppm)
	EVA	Polyox	CHG		
1.0	70	15 (60:40)	15 ICI	S	5.51
1.0	65	15 (60:40)	20 ICI	S	6.49

EP 0 600 004 B1

(continued)

	Thickness (mm)	Composition(%)				[CHG] (ppm)
		EVA	Polyax	CHG		
5	1.0	70	15 (N-750)	15 ICI	S	20.98
	0.5	70	15 (60:40)	15 ICI	S	1.32
	0.5	70	15 (N-750)	15 ICI	S	1.57
10	0.5	70	15 (N-750)	15 ICI	S	2.19
	0.5	70	15 (N-750)	15 ICI	S	2.53
	1.0	65	20 (N-750)	15 ICI	S	8.63
	1.0	60	25 (N-750)	15 ICI	S	12.41
15	1.0	50	35 (N-750)	15 ICI	S	7.04
	1.0	70	15 (N-750)	15 ICI	T	7.84
	1.0	70	15 (N-750)	15 ICI	T	23.15
20	1.0	70	15 (N-750)	15 ICI	T	2.73
	1.0	70	10 (N-750)	20 ICI	T	21.38
	2.0	65	15 (N-750)	20 (60m ICI)	S	17.59
	2.0	70	15 (N-750)	15 (Pliva)	S	12.43
25	2.0	65	20 (N-750)	15 (60m ICI)	S	7.62
	2.0	70	15 (N-750)	15 (60m ICI)	S	11.20
	2.0	70	15 (N-750)	15 (18m ICI)	S	6.78
30	2.0	70	15 (N-750)	15 (60m ICI)	T	9.10
	2.0	65	20 (N-750)	15 (60m ICI)	T	9.08
	2.0	70	15 (N-750)	15 (Pliva)	T	1.53
	2.0	60	15 (N-750)	25 (60m ICI)	T	50.76
35	2.0	65	15 (N-750)	20 (60m ICI)	T	7.67
	2.0	60	15 (N-750)	25 (60m Pliva)	T	9.83
	2.0	55	15 (N-750)	30 (60m Pliva)	T	7.10
40	2.0	60	15 (N-750)	25 (60m ICI)	S	63.00
	2.0	55	10 (N-750)	35 (60m Pliva)	T	15.78
	2.0	60	15 (N-750)	25 (18m ICI)	S	62.34
	2.0	60	15 (N-750)	25 (60m (Pliva)		47.22
45	2.0	60	15 (N-750)	25 (Pliva)	S	72.63
	2.0	60	15 (N-750)	25 (Pliva)	T	29.72
	2.0	60	15 (N-750)	25 (ICI)	S	54.56
50	2.0	60	15 (N-750)	25 (ICI)	T	31.37
	2.0	60	15 (N-750)	25 (60m Pliva)	S	61.24
	2.0	60	15 (N-750)	25 (60m Pliva)	S	60.03
55	2.0	60	15 (N-750)	25 (60m Pliva)	S	60.43

## 2. Two-layer template including chlorhexidine

The preferred single-layer template generally includes over 50% support resin (EVA) by weight to achieve good mechanical properties and processability. This, to some extent, limits the quantity of chlorhexidine that can be included in the matrix. An alternative two-layer template provides a higher quantity of chlorhexidine in the portion of the template that primarily contacts water and saliva. The first, outer layer contains less ethylene vinyl acetate and more polyethylene oxide and chlorhexidine. The second, inner layer has the composition of the preferred single-layer embodiment, although the second layer could consist entirely of ethylene vinyl acetate. A preferred two-layer matrix includes 65% ethylene vinyl acetate, 15% Polyox, and 20% chlorhexidine digluconate in the inner layer, and 30% ethylene vinyl acetate, 25% Polyox, and 45% chlorhexidine digluconate in the outer layer. The inner layer should include at least 60% of the support resin; the outer layer can include upwards of 50% chlorhexidine.

The outer layer releases a higher dosage of chlorhexidine when contacted with water, yet has good strength and processability because the second layer provides the necessary support. As the outer layer wears away, the antimicrobial agent in the inner layer also is released. The outer layer preferably is 0.25 to 3 mm thick, while the inner layer preferably is 0.1 to 0.5 mm thick.

The two-layer templates can be produced either by conventional co-extrusion or co-injection molding techniques, from two different mixtures. Alternatively one layer can be extruded and then the other layer can be thermoformed/compression molded or laminated onto the extruded layer.

An alternative two-layer embodiment has an outer layer consisting only of the support resin and the anti-microbial agent. The preferred anti-microbial agent, chlorhexidine digluconate, is water-soluble, although not to the same degree as the water-soluble polyethylene oxide. Because the outer layer includes a high quantity of the anti-microbial agent, enough of the agent can dissolve out of the matrix to provide a sufficient dosage of the agent without the assistance of a water-soluble polymer.

## 3. Template including a colorant

The wear-indicator template preferably includes two layers, each with a different colorant. The outer layer includes a water-soluble polymer (preferably polyethylene oxide, polyethylene glycol, or polyvinyl alcohol) and a colorant, preferably a water-leachable colorant; a support resin is optional. The inner layer includes a support resin and a second colorant, like titanium dioxide, which provides a solid white appearance. The different colorants should be selected to provide a clear contrast so that a user can plainly discern the color change as the colorant in the outer layer leaches out over time.

The two-layer templates including a colorant can be produced by the same techniques used to produce the two-layer templates including an antimicrobial agent discussed above.

The preferred wear-indicating template is illustrated in Fig. 2a and consists of an outer layer 22, which includes the colorant that is released during use, and an inner layer 24, which is adjacent the toothbrush during use. Inner layer 24 includes titanium dioxide.

Alternative two-layer template embodiments are illustrated in Figs. 2b-2f. In these embodiments, no colorant is included in the outer layer 26 and a non-white colorant is included in the inner layer 28. The outer layer in these embodiments preferably consists only of water-soluble polymer; as the outer layer dissolves away during use the colorant in the second layer becomes visible, or more visible, providing an indication of the degree of wear of the brush.

Referring to Fig. 2b, a template has a flat outer layer 26 and a flat inner layer 28 that are approximately the same size. As outer layer 26 dissolves away with repeated use, a colorant in inner layer 28 becomes visible to a user looking straight down at the surface of the bristles that contact the teeth.

Referring to Fig. 2c, inner layer 28 of a template has elements 30 that extend into grooves in outer layer 26. As outer layer 26 dissolves away, elements 30, which include colorant, become visible to the user as stripes at the base of the bristles. A similar embodiment is illustrated in Fig. 2d, except that elements 32 extend along the exterior of outer layer 26. In this embodiment, as outer layer 26 dissolves away a colored strip along the edge of the template becomes visible to a user looking straight down at the surface of the bristles that contact the teeth.

Referring to Figs 2e and 2f, an alternative template includes an inner layer 28 that is fully surrounded by the outer layer 26 except at surface 34, where the template is attached to the head of the brush. As outer layer 26 dissolves, inner layer 28 becomes visible from the sides and from the top.

Although not illustrated, other alternative matrices include those in which the inner layer(s) is simply two narrow strips, like elements 30; and those in which the inner layer includes cylindrical elements that extend upwards from the inner layer into the outer layer. In the latter embodiment, as the outer layer dissolves away the inner layer becomes visible as colored dots.

The following examples were made from two 1.90 cm (3/4 inch) extruders with a co-extrusion die to produce two-layer templates having the design shown in Fig. 2a and having a thickness of about 10 mm.



Example A

The first layer of the template consisted of 44.6% ethylene vinyl acetate (Elvax 360), 44.5% Polyox N-750, 10% polyethylene glycol (Dow-E4500), and 0.9% of a dark blue pigment (FD&C Blue No. 2, Aluminum Lube 35-42%, available from Warner Jenkinson of St. Louis, MO). The second layer consisted of 99.5% Elvax 360 and 0.5% titanium dioxide. When the template was submerged in water for 24-hours, the initial dark blue color changed to a light blue.

Example B

The first layer of the template includes 49.5% Elvax 360, 49.5% Polyox N-750, and 1% dark blue pigment. The second layer was the same as in Example A. The results of a 24-hour water-submerge test also were the same.

Example C

The first layer of the template consists of 99% polyvinyl alcohol and 1% of the dark blue pigment, and no support resin. The second layer was the same as for the other two examples. When this template was subjected to a 24-hour water-submerge test, the initial dark blue color of the template turned to white.

Other Embodiments

Other embodiments are within the claims. For example, other water-insoluble polymers can be used as the support resin. To determine whether a polymer can be used as a support resin within the meaning of this application, a template should be prepared containing 60% of the polymer, 15% Polyox WSR N-750®, and 25% chlorhexidine digluconate. Matrix samples 1.27 cm x 2.54 cm (1/2" x 1") having a thickness of 2 mm are placed in 250 ml beakers which are then set into a shaking water bath (37°C., 80 rpm) for 8 hours. If the matrix has maintained its structural integrity in the bath and does not fall apart, the polymer is a support resin. Examples of the specific polymers that can be used in place of EVA as the support resins include Hytrel G-4074® (a polyester available from DuPont); Hytrel 4056® (polyester elastomer also available from DuPont); Vestenamer 8012® (TPE, available from Huls America); Rimplast PSW 2159® (a silicone, available from Petrarch Systems); Prolytropes® (an ethylene/propylene alloy available from A. Schulman, Inc.); Millathanes® (a polyester urethane available from Millathane); Kraton G-7680® (a Styrene/rubber available from Shell Chemical); and Santoprene 101-55® (a polyolefin alloy available from Monsanto Chemical). Prolytropes and Kraton G-7680 are more preferred because of their relatively low processing temperatures, 29°C. and 57°C., respectively. Examples of other general classes of polymers that can be used as support resins include Polyurethanes, polycarbonates, polyesters, polyethylenes, polypropylenes, polystyrenes, and polyvinyl chloride; polyurethanes, polyethylenes, and polystyrenes are more preferred because forms of these polymers with relatively low processing temperatures are available.

Additionally, other water-soluble substances can be used in place of Polyox in the matrix. To determine whether something is a water-soluble substance within the meaning of this application, a template should be prepared containing 80% EVA and 20% of the substance. Matrix samples 1.27 cm x 2.54 cm (1/2" x 1") having a thickness of 2mm are placed in 250 ml beakers which are then set into a shaking water bath (37°C., 80 rpm) for 8 hours. After that time, the matrix is removed, and photomicrographs (magnification of 350X) of the matrix after the procedure are compared to photomicrographs (350X) of the matrix prior to the procedure. If after the procedure channels and pores have formed into the matrix, the substance is a water-soluble substance. Other water-soluble natural polymers that can be used include agar; carrageenan; corn starch; guar gum; gum arabic; gum karaya; gum tragacanth; locust bean gum; potato, wheat and rice starches; tapioca; casein; pectin; and sodium alginate. Modified natural polymers that can be used include cationic starch; dextran; hydroxyalkyl starches; hydroxyethyl and hydroxypropyl cellulose; methyl cellulose; sodium carboxymethyl cellulose; xanthan gum; gelatin; and sodium carboxymethyl starch. Synthetic polymers suitable for use include polyvinyl alcohol; cationic resins and quaternary ammonium compounds; poly (N-vinyl-2-pyrrolidone); vinyl ether polymers; styrene-maleic anhydride copolymers; ethylene-maleic anhydride copolymer; hydrophilic gels; and polymeric surface-active agents. Inorganic salts, (e.g., EDTA, NaCl, Na<sub>2</sub>CO<sub>3</sub> and KCl) and fillers may also be used.

Anti-microbial agents that can be used in place of chlorhexidine digluconate include antibiotics such as actinobolin, chlortetracycline, tetracycline, streptomycin, kanamycin, neomycin, niddamycin, bacitracin, erythromycin, penicillin, rancemycin, gramicidin, saramycin, and polymyxin B; as well as antiplaque enzymes such as mucinases, pancreatin, fungal enzymes, protease-amylase, dextranase, moimnase, zendium, amyloglucosidase, and glucose oxidase. Other conventional anti-microbials that can be used include phenolic compounds (e.g., phenol, thymol, 2-phenylphenol, hexylresorcinol), and listerine (thymol, eucalyptol, menthol, methylsalicylate); bipyridines (e.g., octenidene); pyrimidines (e.g., hexetidine); halogens (e.g., iodine, iodophores, fluorides); quaternary ammonium salts (e.g., cetylpyridinium chloride, benzethonium chloride, domiphen bromide); oxygenating agents (e.g., peroxides; perborate); herbal extracts (e.g.,

sangnimarine); heavy metal salts (e.g., silver, mercury, zinc, copper, tin); and other bisbiguanidines besides chlorhexidine (e.g., alexidine). Of course, other chlorhexidine salts like the diacetate and dihydrochloride can be used in place of chlorhexidine digluconate.

Moreover, the matrices can be used in other ways, for example by impregnating the bristles of a toothbrush with small matrix particles, by inserting the matrices into the holes the toothbrush head into which bristles are then inserted, or by coating the matrix on dental floss. The matrix also can be attached to the side of the head of the toothbrush opposite the side to which the bristles are attached. Alternatively, a matrix can be designed to be inserted and left in the mouth for an extended period of time, for example as a small ring that fits around a tooth.

Templates can be designed that are sustained-release but that do not release over 1 ppm chlorhexidine after 100 uses by the test previously designed. For example, a disposable toothbrush, which would be discarded after only a few uses, does not require such extended release lifetime. For the purposes of this invention, Sustained-release means that the matrix still releases at least 1 ppm of the anti-microbial agent after 10 uses (more preferably after 50 uses) when tested according to the procedure described in the Preferred Embodiment section.

Any of the two-layer templates shown in Figure 2 can be used to provide the sustained-release of an anti-microbial agent.

Further, other well-known, conventional additives such as fillers, binders, lubricants, and channeling agents can be included in the matrix, although care should be taken that these additives do not adversely affect the agent release rate.

#### Claims

1. An oral brush (10) comprising:
  - a body comprising a handle (12) and head (14);
  - a brush portion connected to the head of said body and an attached layer comprising an antimicrobial agent characterized by said layer being a sustained-release matrix (20) attached to said body at or near said head (14), said matrix (20) comprising a water-insoluble support resin, a water-soluble polymer, and said anti-microbial agent.
2. The oral brush of claim 1, wherein said resin comprises ethylene vinyl acetate.
3. The oral brush of claim 1, wherein said polymer comprises polyethylene oxide.
4. The oral brush of claim 1, wherein said anti-microbial agent comprises chlorhexidine.
5. The oral brush of claim 1, wherein said resin comprises ethylene vinyl acetate, said water soluble substance comprises polyethylene oxide, and said anti-microbial comprises chlorhexidine.
6. The oral brush of claim 1, wherein said matrix comprises a flat template no greater than 4mm thick.
7. The oral brush of claim 1, wherein said matrix (20) comprises between 50 percent and 90 percent by weight ethylene vinyl acetate; between 5 percent and 40 percent by weight polyethylene oxide; and between 1 percent and 30 percent by weight anti-microbial agent.
8. The oral brush of claim 1, wherein said matrix comprises
  - a. a first layer (22, 26) including said water-soluble polymer and said anti-microbial agent, and
  - b. a second layer (24, 28) joined with said first layer (22, 26) and comprising said support resin.
9. The oral brush of claim 8, wherein said water-soluble polymer is polyethylene oxide.
10. The oral brush of claim 8, wherein said support resin is ethylene vinyl acetate.
11. The oral brush of claim 1, wherein said matrix comprises
  - a. a first layer (22, 26) comprising said anti-microbial agent and said support resin, and
  - b. a second layer (24, 28) joined with said first layer and comprising said support resin.
12. The oral brush of claim 11, wherein said support resin comprises ethylene vinyl acetate.

13. The oral brush of claim 1, wherein said brush comprises a plurality of bristles (16) and said matrix (20) is in the form of a flat template disposed at the base of said bristles (16).
- 5 14. A method of releasing an anti-microbial agent from an oral brush, comprising  
providing an oral brush including a body (10) with a handle (12) and a head (14), a brush portion attached to said head (14), and an attached layer comprising an anti-microbial agent, characterized by said layer being a sustained-release matrix (20) attached to said body at or near said head, said matrix (20) comprising a water-insoluble support resin, a water-soluble polymer, and said anti-microbial agent; and  
10 contacting the portion of said brush (10) to which said matrix (20) is attached with water, causing said water-soluble polymer in said matrix (20) to dissolve, thereby releasing said anti-microbial agent into said water.
- 15 15. The method of claim 14, further comprising inserting said portion of the brush including said matrix (20) into the mouth of an animal, the saliva of the animal including water that causes said water-soluble polymer to dissolve thereby releasing said anti-microbial agent into said mouth.
16. The method of claim 14, wherein said anti-microbial agent is chlorhexidine.
17. The method of claim 14, wherein said resin comprises ethylene vinyl acetate.
- 20 18. The method of claim 14, wherein said water-soluble polymer comprises polyethylene oxide.
19. The method of claim 14, wherein said brush comprises a plurality of bristles (16) and said matrix is in the form of a flat template (20) disposed at the base of said bristles.
- 25 20. A wear-indicating matrix (20) characterized by comprising a water-insoluble support resin, a colorant and a water-leachable substance that leaches into water during use to cause said matrix (20) to change color after repeated uses.
- 30 21. The wear-indicating matrix of claim 20, wherein said water-leachable substance comprises a water-soluble polymer.
22. The wear-indicating matrix of claim 21, wherein said water-soluble polymer is selected from polyethylene oxide, polyethylene glycol and polyvinyl alcohol.
- 35 23. The wear-indicating matrix of claim 22, wherein said support resin is selected from polystyrene, polyurethane, ethylene vinyl acetate, polyethylene, styrene/rubber and ethylene/propylene.
- 40 24. The wear-indicating matrix of claim 20, wherein the matrix comprises  
a first layer (22, 26) comprising the water-leachable substance; and  
a second layer (24, 28) comprising the water-insoluble support resin.
- 45 25. The wear-indicating matrix of claim 24, wherein said second layer (24, 28) comprises said colorant.
26. The wear-indicating matrix of claim 24, wherein said first layer (22, 26) comprises said colorant.
27. The wear-indicating matrix of claim 24, wherein said first layer (22, 26) comprises a first colorant and said second layer (24, 28) comprises a second colorant which is a different color than said first colorant.
- 50 28. The wear-indicating matrix of claim 25, 26 or 27 wherein said water-leachable substance comprises a water-soluble polymer.
29. The wear-indicating matrix of claim 28, wherein said water-soluble polymer comprises polyethylene oxide.
- 55 30. The wear-indicating matrix of claim 29, wherein said first layer (22, 26) further comprises a water-insoluble support resin.

31. The wear-indicating matrix of claim 30, wherein said support resin is selected from polystyrene, polyurethane, ethylene vinyl acetate, polyethylene, styrene/rubber and ethylene/propylene.
32. The wear-indicating matrix of claim 27, wherein said first layer (22, 26) dissolves away through repeated use to expose said second layer (24, 28), thereby revealing a color change.
33. A wear-indicating template (20) characterized by comprising two layers, an outer layer (22, 26) including a water-soluble polymer and a first colorant and an inner layer (24, 28) including a water-insoluble support resin and a second colorant, wherein said first and second colorants are selected so as to provide a discernible color change as said first colorant leaches out over time during use.
34. The wear-indicating template of claim 33, wherein said water-soluble polymer comprises polyethylene oxide.
35. The wear-indicating template of claim 33 or 34, wherein said outer layer also includes a support resin.
36. The wear-indicating template of claim 35, wherein said support resin is selected from polystyrene, polyurethane, ethylene vinyl acetate, polyethylene, Styrene/rubber and ethylene/propylene.
37. The wear indicating matrix of any of Claims 20 to 32 additionally comprising an anti-microbial agent, wherein the change of color corresponds with the depletion of said anti-microbial agent.

#### Patentansprüche

1. Zahnbürste (10) umfassend:
- einen Rumpf umfassend einen Griff (12) und einen Kopf (14);
- einen Bürstenteil, der mit dem Kopf des Rumpfes verbunden ist und eine angebrachte Schicht umfassend ein antimikrobielles Mittel, dadurch gekennzeichnet, daß die Schicht eine Matrix mit verzögerter Freisetzung (20) ist, die an dem Rumpf am oder in der Nähe des Kopfes angebracht ist, wobei die Matrix (20) ein Trägerharz, eine wasserlösliche Substanz und ein antimikrobielles Mittel umfaßt.
2. Zahnbürste gemäß Anspruch 1, wobei das Harz Ethylenvinylacetat umfaßt.
3. Zahnbürste gemäß Anspruch 1, wobei das Polymer Polyethylenoxid umfaßt.
4. Zahnbürste gemäß Anspruch 1, wobei das antimikrobielle Mittel Chlorhexidin umfaßt.
5. Zahnbürste gemäß Anspruch 1, wobei das Harz Ethylenvinylacetat umfaßt, die wasserlösliche Substanz Polyethylenoxid umfaßt und das antimikrobielle Mittel Chlorhexidin umfaßt.
6. Zahnbürste gemäß Anspruch 1, wobei die Matrix ein flaches Templat umfaßt, das nicht mehr als 4 mm dick ist.
7. Zahnbürste gemäß Anspruch 1, wobei die Matrix (20) zwischen 50 Gew.-% und 90 Gew.-% Ethylenvinylacetat; zwischen 5 Gew.-% und 40 Gew.-% Polyethylenoxid; und zwischen 1 Gew.-% und 30 Gew.-% des antimikrobiellen Mittels umfaßt.
8. Zahnbürste gemäß Anspruch 1, wobei die Matrix
- a) eine erste Schicht (22, 26) enthaltend ein wasserlösliches Polymer und ein mikrobielles Mittel und
- b) eine zweite, mit der ersten Schicht (22, 26) verbundenen Schicht (24, 28) umfassend ein Trägerharz umfaßt.
9. Zahnbürste gemäß Anspruch 8, wobei das wasserlösliche Polymer Polyethylenoxid ist.
10. Zahnbürste gemäß Anspruch 8, wobei das Trägerharz Ethylenvinylacetat ist.

11. Zahnbürste gemäß Anspruch 1, wobei die Matrix
  - a) eine erste Schicht (22, 26) umfassend das antimikrobielle Mittel und das Trägerharz, und
  - 5 b) eine zweite, mit der ersten Schicht verbundene Schicht (24, 28) umfassend das Trägerharz umfaßt.
12. Zahnbürste gemäß Anspruch 11, wobei das Trägerharz Ethylenvinylacetat umfaßt.
- 10 13. Zahnbürste gemäß Anspruch 1, wobei die Bürste eine Vielzahl an Borsten (16) umfaßt und die Matrix (20) in Form eines flachen Templates vorliegt, das an dem Fuß der Borsten (16) angebracht ist.
14. Verfahren zur Freisetzung eines antimikrobiellen Mittels aus einer Zahnbürste, umfassend
  - 15 Bereitstellen einer Zahnbürste einschließlich eines Rumpfes (10) mit einem Griff (12) und einem Kopf (14), einem an dem Kopf (14) angebrachten Bürstenteil und eine angebrachte Schicht umfassend ein antimikrobielles Mittel, dadurch gekennzeichnet, daß die Schicht eine Matrix mit verzögerter Freisetzung (20) ist, die an dem Rumpf an oder in der Nähe des Kopfes angebracht ist, wobei die Matrix (20) ein wasserunlösliches Trägerharz, ein wasserlösliches Polymer und das antimikrobielle Mittel umfaßt; und
  - 20 Inkontaktbringen des Teils der Bürste (10), an dem die Matrix (20) angebracht ist, mit Wasser, wodurch bewirkt wird, daß sich das wasserlösliche Polymer in der Matrix (20) löst, wodurch das antimikrobielle Mittel in das Wasser freigesetzt wird.
- 25 15. Verfahren gemäß Anspruch 14, weiterhin umfassend das Einbringen des Teiles der Bürste umfassend die Matrix (20) in den Mund eines Tieres, wobei der Speichel des Tieres enthaltend Wasser bewirkt, daß sich das wasserlösliche Polymer löst, wodurch das antimikrobielle Mittel in den Mund freigesetzt wird.
16. Verfahren gemäß Anspruch 14, wobei das antimikrobielle Mittel Chlorhexidin ist.
- 30 17. Verfahren gemäß Anspruch 14, wobei das Harz Ethylenvinylacetat umfaßt.
18. Verfahren gemäß Anspruch 14, wobei das wasserlösliche Polymer Polyethylenoxid umfaßt.
- 35 19. Verfahren gemäß Anspruch 14, wobei die Bürste eine Vielzahl von Borsten (16) umfaßt und die Matrix in Form eines flachen Templates (20) vorliegt, welches an dem Fuß der Borsten angebracht ist.
20. Abnutzungsanzeigematrix (20), dadurch gekennzeichnet, daß sie ein wasserunlösliches Trägerharz, ein Färbemittel und eine mit Wasser auslaugbare Substanz umfaßt, die in das Wasser während der Verwendung auslaugt, wodurch bewirkt wird, daß sich die Farbe der Matrix (20) nach wiederholten Verwendungen ändert.
- 40 21. Abnutzungsanzeigematrix gemäß Anspruch 20, wobei die mit Wasser auslaugbare Substanz ein wasserlösliches Polymer umfaßt.
- 45 22. Abnutzungsanzeigematrix gemäß Anspruch 21, wobei das wasserlösliche Polymer ausgewählt ist aus Polyethylenoxid, Polyethylenglykol und Polyvinylalkohol.
23. Abnutzungsanzeigematrix gemäß Anspruch 22, wobei das Trägerharz ausgewählt ist aus Polystyrol, Polyurethan, Ethylenvinylacetat, Polyethylen, Styrol/Kautschuk und Ethylen/Propylen.
- 50 24. Abnutzungsanzeigematrix gemäß Anspruch 20, wobei die Matrix eine erste Schicht (22, 26) umfassend eine mit Wasser auslaugbare Substanz; und eine zweite Schicht (24, 28) umfassend ein wasserunlösliches Trägerharz umfaßt.
- 55 25. Abnutzungsanzeigematrix gemäß Anspruch 24, wobei die zweite Schicht (24, 28) das Färbemittel umfaßt.
26. Abnutzungsanzeigematrix gemäß Anspruch 24, wobei die erste Schicht (22, 26) das Färbemittel umfaßt.

## EP 0 600 004 B1

27. Abnutzungsanzeigematrix gemäß Anspruch 24, wobei die erste Schicht (22, 26) ein erstes Färbemittel umfaßt und die zweite Schicht (24, 28) ein zweites Färbemittel umfaßt, welches sich farblich von dem ersten Färbemittel unterscheidet.
- 5 28. Abnutzungsanzeigematrix gemäß Anspruch 25, 26 oder 27, wobei die mit Wasser auslaugbare Substanz ein wasserlösliches Polymer umfaßt.
29. Abnutzungsanzeigematrix gemäß Anspruch 28, wobei das wasserlösliche Polymer Polyethylenoxid umfaßt.
- 10 30. Abnutzungsanzeigematrix gemäß Anspruch 29, wobei die erste Schicht (22, 26) weiterhin ein wasserunlösliches Trägerharz umfaßt.
31. Abnutzungsanzeigematrix gemäß Anspruch 30, wobei das Trägerharz ausgewählt ist aus Polystyrol, Polyurethan, Ethylvinylacetat, Polyethylen, Styrol/Kautschuk und Ethylen/Propylen.
- 15 32. Abnutzungsanzeigematrix gemäß Anspruch 27, wobei die erste Schicht (22, 26) sich durch wiederholte Verwendung löst, wodurch die zweite Schicht (24, 28) freigelegt wird, wodurch eine Farbänderung auftritt.
33. Abnutzungsanzeigetemplat (20), dadurch gekennzeichnet, daß es zwei Schichten umfaßt, eine äußere Schicht (22, 26) enthaltend ein wasserlösliches Polymer und ein erstes Färbemittel und eine innere Schicht (24, 28) enthaltend ein wasserunlösliches Trägerharz und ein zweites Färbemittel, wobei das erste und das zweite Färbemittel so gewählt werden, daß sie eine erkennbare Farbveränderung bereitstellen, wenn das erste Färbemittel mit der Zeit während der Verwendung auslaugt.
- 20 34. Abnutzungsanzeigetemplat gemäß Anspruch 33, wobei das wasserlösliche Polymer Polyethylenoxid umfaßt.
35. Abnutzungsanzeigetemplat gemäß Anspruch 33 oder 34, wobei die äußere Schicht auch ein Trägerharz enthält.
36. Abnutzungsanzeigetemplat gemäß Anspruch 35, wobei das Trägerharz ausgewählt ist aus Polystyrol, Polyurethan, Ethylvinylacetat, Polyethylen, Styrol/Kautschuk und Ethylen/Propylen.
- 30 37. Abnutzungsanzeigematrix gemäß einem der Ansprüche 20 bis 32, die zusätzlich ein antimikrobielles Mittel umfaßt, wobei die Farbveränderung dem Verbrauch des antimikrobiellen Mittels entspricht.

## 35 Revendications

1. Brosse bucco-dentaire comprenant:
- 40 un corps comprenant un manche (12) et une tête (14);  
une partie de brosse raccordée à la tête dudit corps et une couche fixée comprenant un agent antimicrobien caractérisée par ladite couche étant une matrice à libération prolongée (20) fixée audit corps sur ou près de ladite tête (14), ladite matrice (20) comprenant une résine de support insoluble dans l'eau, un polymère soluble dans l'eau, et ledit agent antimicrobien.
- 45 2. Brosse bucco-dentaire selon la revendication 1, dans laquelle ladite résine comprend de l'éthylène-acétate de vinyle.
3. Brosse bucco-dentaire selon la revendication 1, dans laquelle ledit polymère comprend du poly(oxyde d'éthylène).
- 50 4. Brosse bucco-dentaire selon la revendication 1, dans laquelle ledit agent antimicrobien comprend de la chlorhexidine.
5. Brosse bucco-dentaire selon la revendication 1, dans laquelle ladite résine comprend de l'éthylène-acétate de vinyle, ladite substance soluble dans l'eau comprend du poly(oxyde d'éthylène) et ledit agent antimicrobien comprend de la chlorhexidine.
- 55 6. Brosse bucco-dentaire selon la revendication 1, dans laquelle ladite matrice comprend un gabarit plat d'épaisseur d'au plus 4 mm.

7. Brosse bucco-dentaire selon la revendication 1, dans laquelle ladite matrice (20) comprend entre 50 pour-cent et 90 pour-cent en poids d'éthylène-acétate de vinyle; entre 5 pour-cent et 40 pour-cent en poids de poly(oxyde d'éthylène); et entre 1 pour-cent et 30 pour-cent en poids d'agent antimicrobien.
- 5 8. Brosse bucco-dentaire selon la revendication 1, dans laquelle ladite matrice comprend
  - a. une première couche (22, 26) comprenant ledit polymère soluble dans l'eau et ledit agent antimicrobien, et
  - b. une seconde couche (24, 28) jointe à ladite première couche (22, 26) et comprenant ladite résine de support.
- 10 9. Brosse bucco-dentaire selon la revendication 8, dans laquelle ledit polymère soluble dans l'eau est le poly(oxyde d'éthylène).
- 15 10. Brosse bucco-dentaire selon la revendication 8, dans laquelle ladite résine de support est l'éthylène-acétate de vinyle.
11. Brosse bucco-dentaire selon la revendication 1, dans laquelle ladite matrice comprend
  - a. une première couche (22, 26) comprenant ledit agent antimicrobien et ladite résine de support, et
  - 20 b. une seconde couche (24, 28) jointe à ladite première couche et comprenant ladite résine de support.
12. Brosse bucco-dentaire selon la revendication 11, dans laquelle ladite résine de support comprend de l'éthylène-acétate de vinyle.
- 25 13. Brosse bucco-dentaire selon la revendication 1, dans laquelle ladite brosse comprend de nombreux poils (16) et ladite matrice (20) est dans la forme d'un gabarit plat disposé à la base desdits poils (16).
- 30 14. Procédé de libération d'un agent antimicrobien à partir d'une brosse bucco-dentaire, comprenant les étapes consistant:
  - à Fournir une brosse bucco-dentaire comprenant un corps (10) avec un manche (12) et une tête (14), une partie de brosse fixée à ladite tête (14), et une couche fixée comprenant un agent antimicrobien, caractérisé par ladite couche étant une matrice à libération prolongée (20) fixée audit corps sur ou près de ladite tête, ladite
  - 35 matrice (20) comprenant une résine de support insoluble dans l'eau, un polymère soluble dans l'eau et ledit agent antimicrobien, et
  - à mettre en contact la partie de ladite brosse (10) sur laquelle ladite matrice (20) est fixée avec de l'eau, occasionnant le fait que ledit polymère soluble dans l'eau dans ladite matrice (20) se dissout, libérant par à ledit agent antimicrobien dans ladite eau.
- 40 15. Procédé selon la revendication 14, comprenant en outre l'insertion de ladite partie de la brosse comprenant ladite matrice (20) dans la bouche d'un animal, la salive d'un animal comprenant de l'eau qui occasionne le fait que ledit polymère soluble dans l'eau se dissout, libérant par à ledit agent antimicrobien dans ladite bouche.
- 45 16. Procédé selon la revendication 14, dans lequel ledit agent antimicrobien est la chlorhexidine.
17. Procédé selon la revendication 14, dans lequel ladite résine comprend de l'éthylène-acétate de vinyle.
18. Procédé selon la revendication 14, dans lequel ledit polymère soluble dans l'eau comprend du poly(oxyde d'éthylène).
- 50 19. Procédé selon la revendication 14, dans lequel ladite brosse comprend de nombreux poils (16) et ladite matrice est dans la forme d'un gabarit plat (20) disposé à la base desdits poils.
20. Matrice indiquant l'usure (20) caractérisée par le fait qu'elle comprend une résine de support insoluble dans l'eau, un colorant et une substance lessivable dans l'eau qui se lessive dans l'eau pendant l'utilisation pour occasionner le fait que ladite matrice (20) change de couleur après des utilisations répétées.
- 55 21. Matrice indiquant l'usure selon la revendication 20, dans laquelle ladite substance lessivable dans l'eau comprend

un polymère soluble dans l'eau.

22. Matrice indiquant l'usure selon la revendication 21, dans laquelle ledit polymère soluble dans l'eau est choisi parmi le poly(oxyde d'éthylène), le polyéthylèneglycol et le poly(alcool vinylique).
23. Matrice indiquant l'usure selon la revendication 22, dans laquelle ladite résine de support est choisie parmi le polystyrène, le polyuréthane, l'éthylène-acétate de vinyle, le polyéthylène, le styrène/caoutchouc et l'éthylène/propylène.
24. Matrice indiquant l'usure selon la revendication 20, dans laquelle la matrice comprend  
une première couche (22, 26) comprenant la substance lessivable dans l'eau; et  
une seconde couche (24, 28) comprenant la résine de support insoluble dans l'eau.
25. Matrice indiquant l'usure selon la revendication 24, dans laquelle ladite seconde couche (24, 28) comprend ledit colorant.
26. Matrice indiquant l'usure selon la revendication 24, dans laquelle ladite première couche (22, 26) comprend ledit colorant.
27. Matrice indiquant l'usure selon la revendication 24, dans laquelle ladite première couche (22, 26) comprend un premier colorant et ladite seconde couche (24, 28) comprend un second colorant qui est de couleur différente que ledit premier colorant.
28. Matrice indiquant l'usure selon la revendication 25, 26 ou 27, dans laquelle ladite substance lessivable dans l'eau comprend un polymère soluble dans l'eau.
29. Matrice indiquant l'usure selon la revendication 28, dans laquelle ledit polymère soluble dans l'eau comprend du poly(oxyde d'éthylène)
30. Matrice indiquant l'usure selon la revendication 29, dans laquelle ladite première couche (22, 26) comprend en outre une résine de support insoluble dans l'eau.
31. Matrice indiquant l'usure selon la revendication 30, dans laquelle ladite résine de support est choisie parmi le polystyrène, le polyuréthane, l'éthylène-acétate de vinyle, le polyéthylène, le styrène/caoutchouc et l'éthylène/propylène.
32. Matrice indiquant l'usure selon la revendication 27, dans laquelle ladite première couche (22, 26) se dissout par utilisation répétée pour exposer ladite seconde couche (24, 28) révélant par là une modification de couleur.
33. Gabarit indiquant l'usure (20) caractérisé par le fait qu'il comprend deux couches, une couche externe (22, 26) comprenant un polymère soluble dans l'eau et un premier colorant et une couche interne (24, 28) comprenant une résine de support insoluble dans l'eau et un second colorant, dans lequel lesdits premier et second colorants sont choisis afin de fournir une modification de couleur discernable lorsque ledit premier colorant est lessivé au cours du temps pendant l'utilisation.
34. Gabarit indiquant l'usure selon la revendication 33, dans lequel ledit polymère soluble dans l'eau comprend du poly(oxyde d'éthylène).
35. Gabarit indiquant l'usure selon la revendication 33 ou 34, dans lequel ladite couche externe comprend également une résine de support.
36. Gabarit indiquant l'usure selon la revendication 35, dans lequel ladite résine de support est choisie parmi le polystyrène, le polyuréthane, l'éthylène-acétate de vinyle, le polyéthylène, le styrène/caoutchouc et l'éthylène/propylène.
37. Matrice indiquant l'usure selon l'une quelconque des revendications 20 à 32 comprenant de plus un agent antimicrobien, dans laquelle la modification de couleur correspond à l'appauvrissement dudit agent antimicrobien.



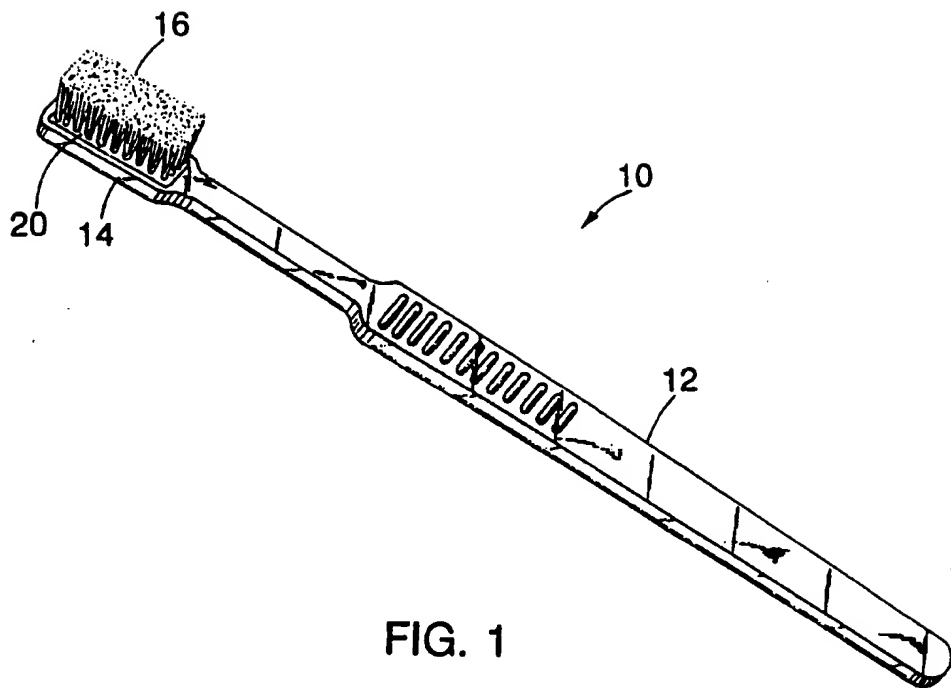


FIG. 1

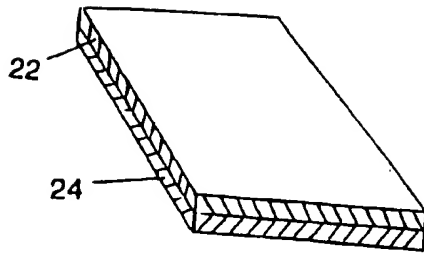


Fig. 2a

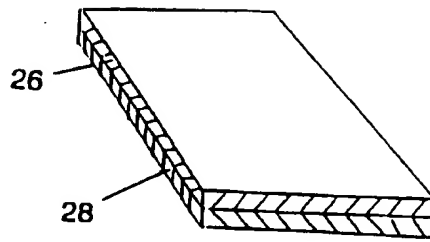


Fig. 2b

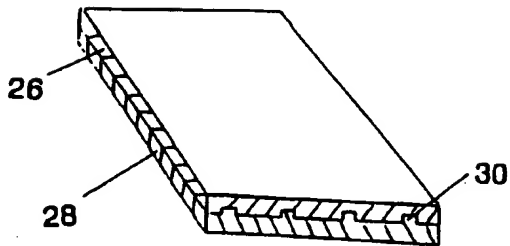


Fig. 2c

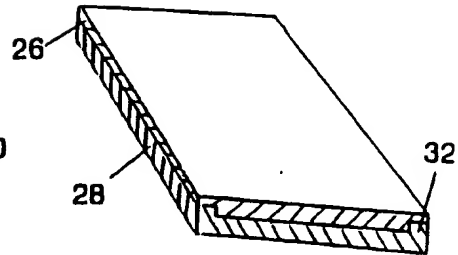


Fig. 2d

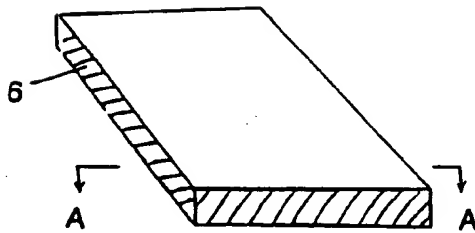


Fig. 2e




Fig. 2f